
Low - Cost Energy - Efficient Air Quality Monitoring System Using Sensor Network

Mare Srbinovska*,
Aleksandra Krkoleva Mateska,
Vesna Andova, Maja Celeska Krsteska and
Tomislav Kartalov

Faculty of Electrical Engineering and Information Technologies,
Ss Cyril and Methodius University in Skopje,
Rugjer Boskovic 18, 1000 Skopje, Republic of North Macedonia
Email: mares@feit.ukim.edu.mk
Email: krkoleva@feit.ukim.edu.mk
Email: vesnaa@feit.ukim.edu.mk
Email: celeska@feit.ukim.edu.mk
Email: kartalov@feit.ukim.edu.mk

*Corresponding author: mares@feit.ukim.edu.mk

Abstract:

The air pollution has a significant impact on human's health and global environment. In urban areas the air quality significantly decreased over the past few years. One of the methods for air pollution reduction is by installing green walls, green roofs or by implementing green buildings as plants have capabilities to absorb the particulate matter through their leaves.

The main goals of this paper are to present system for air quality monitoring using sensor network technology that can be easily deployed in polluted areas and to examine the influence of the experimental green wall setup to particulate matter more precisely PM10 and PM2.5 concentrations in Skopje, Republic of North Macedonia. Furthermore, the paper presents the preliminary results of the ongoing experiment developed to evaluate the impact of green walls in reduction of air polluting particles' concentrations. The air quality monitoring system can be easily replicated on other locations in the urban areas of Skopje.

Keywords: air quality monitoring system, green walls, sensor network, particulate matter

Biographical notes: Mare Srbinovska was born in Skopje, Macedonia. She received the B.Sc. (2003), M.Sc. (2009) and Ph.D. (2015) degrees from the Faculty of Electrical Engineering and Information Technologies, Ss Cyril and Methodius University in Skopje, North Macedonia. She works as an associate professor at the Department of electrical measurement and materials at the same university. Her research interests include wireless sensor networks, data acquisition, sensors and measurement systems, virtual instrumentation. She is author and co-author of over 50 scientific publications. She is a member of IEEE technical professional organization for more than 10 years.

Aleksandra Krkoleva Mateska is an electrical engineer, holds PhD in technical sciences from Ss Cyril and Methodius University in Skopje, Faculty of Electrical Engineering and Information Technologies, Skopje and is associate professor at the same University. She has more than fifteen years of experience and has been a project team member in a number of international projects dealing with renewable energy sources integration, smart grids and novel solutions for transmission systems. Her research interests include electricity markets and regulation, integration of distributed resources and smart grids. She is the author and co-author of more than 70 scientific papers.

Vesna Andova was born in Skopje, North Macedonia. She received B.Sc. (2005) and M.Sc. (2009) degrees in mathematics from Ss. Cyril and Methodius University in Skopje, North Macedonia. In 2013 she received a Ph.D. degree from the Faculty of Mathematics and Physics, University of Ljubljana in Ljubljana Slovenia. She works as an associate professor at the Faculty of Electrical Engineering and IT, Ss Cyril and Methodius University in Skopje, North Macedonia. Her research is mainly in the field of Graph Theory and Chemical Graph Theory. She is author of over 40 scientific publications.

Maja Celeska Krstevska is currently working as an assistant professor at the Ss. Cyril and Methodius University in Skopje. She holds B.Sc. (2012), M.Sc. (2014) and Ph.D (2019) degrees

52 in electrical engineering from the same university, considering that the research for the dissertation
 53 was done at Graz University of Technology. She is author of more than 30 scientific publications
 54 and technical papers from the following areas: renewable energy sources, wind energy conversion,
 55 electromechanical energy conversion and electrical machines. She is a member of IEEE technical
 56 professional organization for more than 10 years.

57 Tomislav Kartalov was born in Skopje, Macedonia. He received the B.Sc. (2002), M.Sc. (2008)
 58 and Ph.D. (2013) degrees from the Faculty of Electrical Engineering and Information
 59 Technologies, University Ss Cyril and Methodius. He works as an associate professor at the same
 60 university. His research interests are in the fields of multimedia processing, digital television,
 61 digital image and video processing, perceptual quality assessment of digital images and video,
 62 image and video coding and decoding and intelligent transportation systems. He has authored over
 63 30 scientific publications in the last decade.

64 This paper is a revised and expanded version of a paper entitled Low-Cost Energy-Efficient Air Quality Monitoring System Using Sensor
 65 Network presented at 54th International scientific conference on information, communication and energy systems and technologies (ICEST
 66 2019), Ohrid, Macedonia, June 27-29, 2019.

67

68 **1 Introduction**

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

149

level data on the impact of two green roofs were used to estimate the PM mitigation from 500000 m² green roof strategy (Speak, et al., 2012). They have concluded that 2.3 % of PM concentrations can be removed per year. The study in (M. & S., 2011) examined that the annual energy consumption for interior heating and cooling can be reduced by using the green roofs. They are on average 15.5 °C cooler than black roofs in summer (Currie, 2008).

The effect of green walls on adjacent air temperature compared to brick wall was analysed in (Cameron, et al., 2014). They explored that in the warmest period the air temperatures were 3°C cooler close to the vegetated walls, also the surface temperature was 9.9°C cooler behind the vegetated walls compared to the brick walls.

Cooling effects of small green urban areas on heat were also examined. Authors in (Bowler, 2010) concluded that daytime air temperatures of green parks were approximately 1°C cooler than non-green urban areas. At the neighbourhood level, increased green space cover and high connectivity between neighbourhood-level green spaces are associated with cooler air temperatures and reduced urban heat island effects, particularly on hot days (Steenefeld, et al., 2011).

The capital city of North Macedonia, Skopje also faces with the problem of the air pollution. The air quality in the city has dramatically decreased over the past few year. Few measurement stations located on different parts of the city have measured a high values of the PM concentrations especially in the winter period. This general air pollution problem was also analyzed by a number of governmental agencies and nongovernmental bodies, but so far, there is no definite list of responsible entities. The public pressure to provide appropriate solution is growing, so government and the city authorities are also investigating the possible sources of the pollution.

The goal of this paper is to present low-cost energy-efficient air quality monitoring system that uses sensor network technology (Pottie, 2008), (Srbinovska, 2015). The system is developed to analyse the influence of the green wall on the air quality improvement. The paper presents results for evaluation of the impact of green walls for reduction of air

69 Air pollution is one of the most dangerous environmental
 70 risks on human health. It can be result of harmful or excessive
 71 quantities of substances including gases, particulates and
 72 biological molecules. Air pollution may cause allergies
 73 disease or even death on humans, also on other living
 74 organisms such as animals. Health problems such as asthma
 75 cardiovascular disease and chronic obstructive pulmonary
 76 disease are result of excessive air pollution (Shah & Balkhair
 77 2011).
 78 Common air pollutants include particulate matter (PM)
 79 sulphur dioxide (SO₂), ozone (O₃), nitrogen dioxide (NO₂)
 80 and carbon monoxide (CO). According to the Air Quality
 81 Guideline of the World Health Organization (WHO)
 82 (Organization, 1999), in 2005, 89% of the world’s population
 83 lived in areas with exceeded air pollution (Brauer, 2012)
 84 Particulate matter (PM10) is emitted from different heating
 85 sources and power plant, while fine particulate matter
 86 (PM2.5) are usually emitted from exhaust vehicles, burning
 87 wood and plastics (Shah & Balkhair, 2011).
 88 Plants that are attached to a surface through various
 89 mechanisms making vegetated vertical surfaces are usually
 90 considered as green walls (Berardi, 2014), (Bigazzi &
 91 Figliozzi, 2015). The plants filter the small particles (fine
 92 dust) from the air and nitrogen dioxide (NO₂). In the cities of
 93 the developing countries and industrialized nations these
 94 particles represent a very serious health problem. For air
 95 pollution improvement using various types of green
 96 infrastructure, the majority of studies have focused on
 97 pollutants such as the PM10 (Coma, et al., 2017) and PM2.5
 98 (Alberto, et al., 2017) that have implications for the adverse
 99 health effects. Positive effect of the green walls consisted of
 100 heder a helix plant on air pollution mitigation is explored in
 101 (Otele M., 2010). Authors in (Rowe, 2011), found that air
 102 pollution removal through green roofs applications is similar
 103 with mitigation effects of urban forest. They explored that
 104 20% of adopted green roofs in Washington, D.C. can remove
 105 the same quantity of air pollution as 17,000 street trees, also
 106 they estimated that with conversion of 20% of all commercial
 107 roofs with green roofs the removal of NO₂ per year is
 108 approximately 889 tonnes. In Manchester, England ground-

150 polluting particles, more specifically the capability of the
 151 green wall to absorb PM10 and PM2.5 concentrations and
 152 other gaseous pollutants. In order to analyse the influence of
 153 the green wall structure, sensor nodes are located on different
 154 positions near the campus of the Faculty of Electrical
 155 Engineering and Information Technologies in Skopje
 156 Republic of North Macedonia.

157 In the second chapter of the paper are described the
 158 development phases of the air quality monitoring system. The
 159 third chapter shows the maximum allowed values for various
 160 air pollutants according to the air quality index values (Anon
 161 n.d.).

162 In the fourth section the measurement results and the
 163 discussion of the monitoring data are given. At the end
 164 section the conclusions are presented.

165 **2 Development phases of the air quality**
 166 **monitoring system**

167 The first step in the implementation process was to select
 168 a proper location for installation of the monitoring system. It

was chosen to be near the Faculty building where there is a
 small tree zone, consisted of deciduous trees and evergreens,
 on one side and one storey small buildings and a parking lot
 on the other side. The two buildings near the sensor network
 are used as classrooms, so there is a frequent movement of
 students. On the top of the platform where the nodes are
 located there is a system of photovoltaic cells that can be used
 as a renewable energies.

One of the sensor nodes was chosen to be near the small
 green area, the second one near the constructed green
 infrastructure and the third one near the parking as it is shown
 in Fig. 1. The position of the nodes was selected to capture
 the effect of the green area, as well as to see the influence of
 the movement of people and vehicles.

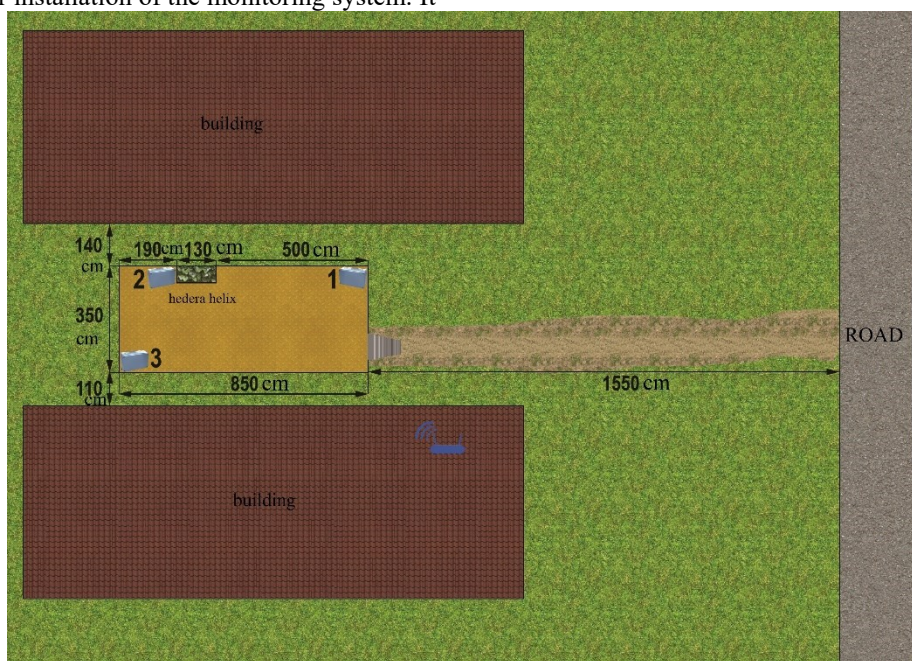


Fig.1 Location of the sensor nodes near the Faculty building



Fig.2. The green wall structure



Fig.3. Position of the sensor node near the hederas helix plant

188

189 The second step was to define the system architecture
 190 and hardware specification of the sensor nodes. Sensor nodes
 191 consist of four sensors measuring the following parameters:
 192 PM10, PM2.5 concentrations, NO₂ and CO. All sensors are
 193 integrated on single chip, including microcontroller and
 194 integrated Wi-Fi module for data transmission (S., et al.
 195 2008).

196 SDS011 is the PM2.5 and PM10 sensing unit. The
 197 technology is based on laser diffraction theory, where particle
 198 density distribution is specified from the light intensity
 199 distribution patterns. The sensor contains a digital output and
 200 a built-in fan, which can measure the particle density
 201 distribution between 0.3 to 10 μm in the air. A built-in
 202 algorithm convert the particle density distribution into
 203 particle mass. The relative error is defined as maximum of
 204 15% and ±10 μg/m³.

205 The main characteristics of the sensing elements are
 206 summerized in Table 1.

Table 1. Main characteristics of the SDS011 sensor

Measurement parameters	PM2.5, PM10
Range	0.0-999.9 μg/m ³
Power supply voltage	5 V
Maximum working current	220 mA
Sleep current	2 mA
Operating temperature	-20 °C - 50 °C
Relative error	Max of. ± 15% and ±10 μg/m ³
Minimum resolution of particle	< 0,3μm

209 MiCS-4514 is a combined CO and NO₂ sensor. Some of
 210 the characteristics are low heater current, wide detection
 211 range, high sensitivity, two sensors in one SMD package with
 212 miniature dimensions. Detection of the polluted gases is
 213 achieved by measuring the sensing resistance of both sensors:

RED (reduced) sensor in the presence of CO decreases the resistance and hydrocarbons, while OX (oxygen) sensor in the presence of NO₂ increases the resistance.

The controller unit is responsible for processing the acquired data before transmitting them to the network. ESP32-WROOM-32D is a powerful module that covers wide range of applications, from low – power sensor networks, to the most demanding tasks like voice encoding, music streaming. The main characteristics of the integrated sensors, microcontroller and the Wi-Fi module are explained in (Velkovski, et al., 2019). The Wi-Fi modules of the nodes send data to a router that is located in one of the buildings near the Faculty building. From that router, the collected data is uploaded on an open platform (Anon., 2020) and can be monitored online or downloaded for additional analyses.

The third phase was to construct and build the green wall structure. The green wall support construction is built of used materials (wooden boards and metal support structures from old furniture). Instead of using new plastic pots, old 6 L plastic water bottles are used. The green wall consists of hederas helix plant, because this type of plant is resistive on negative winter temperatures and different external conditions. The implemented construction is shown in Fig. 2.

All the sensor nodes are protected in plastic boxes as it is shown in Fig. 3. The whole design of the measurement system is made by the authors, so this solution is energy efficient and has a low price.

This system for air pollution monitoring can be easily replicated on other micro-locations on different parts of the city and compared with other monitoring stations that the government bodies have already installed (Jovanovski G., 2020). Measurement stations covering different parts of the city can show that there is a significant variations in the presented measured values of PM concentrations that may differ for more than 20 to 50 μg/m³ from one location to

249 another, depending on the position of the sensor nodes at the
 250 parts of the city.
 251

252 **3 Analysis of measurement data**

253 Table 2 shows the maximum allowed values for various
 254 air pollutants (Anon., n.d.). The allowed values are on daily
 255 basis except for the parameter Ozone (O₃), defined with
 256 average values for 8 h exposure. These values are used as
 257 comparison reference for the measurements at the
 258 experimental setup. The table also provides a reference for
 259 the Air Quality Index (AQI), which may be calculated using
 260 the methodology described in (Heal, 2012).

261 Table 2. Overview of the maximum allowed values of
 262 gases and particulate matter (ANON., N.D.)

AQI Category	PM10 (µg/m ³) (24h)	PM2.5 (µg/m ³) (24h)	NO ₂ (µg/m ³) (24h)	O ₃ (µg/m ³) (8h)	SO ₂ (µg/m ³) (24h)
Good (0-50)	0-50	0-30	0-40	0-50	0-40
Satisfactory (51-100)	51-100	31-60	41-8	51-100	41-80
Moderately polluted (101-200)	101-250	61-90	81-180	101-168	81-380
Poor (201-300)	251-350	91-120	181-280	169-208	381-800
Very poor (301-400)	351-430	121-250	281-400	209-748	801-1600
Severe (401-500)	430+	250+	400+	748+	1600+

263 As shown in Table 2, AQI values are divided into ranges
 264 and each range is assigned with an adequate descriptor: good
 265 (minimal impact), satisfactory (may cause minor breathing
 266 discomfort to sensitive people), moderately polluted (may
 267 cause breathing discomfort to people with lung disease such
 268 as asthma, and discomfort to people with heart disease
 269 children and older adults), poor (may cause breathing
 270 discomfort to people on prolonged exposure, and discomfort
 308

271 to people with heart disease), very poor (may cause
 272 respiratory illness to the people on prolonged exposure) and
 273 severe (may cause respiratory impact even on healthy people,
 274 and serious health impacts on people with lung/heart disease).

275 These reference values can be used to compare the
 276 maximum allowed measured values of particulate matter with
 277 concentration of 10 micrograms or 2.5 micrograms. In the
 278 Table 2 the presented data shows that the daily permitted
 279 values for PM10 concentrations is 50 micrograms per cubic
 280 meter, while the daily allowed values for PM2.5
 281 concentration is 30 micrograms per cubic meter.

282 The values higher than this limit can be unhealthy for
 283 human’s health.
 284

285 **4 Results and discussion**

286 The implemented monitoring system started to log
 287 measurement data from May 2018. The quality of air in that
 288 period of the year is not as bad as during the winter months
 289 (Srbínovska, et al., 2017). After the first equipment tests, the
 290 setup was used to provide continuous measurements of all
 291 four parameters. However, this paper presents the
 292 measurements of PM2.5 and PM10, as these parameters were
 293 critical for the air quality in Skopje, which is already
 294 described in (Srbínovska, et al., 2017). The experimental
 295 setup is designed in a manner that allows measurements to be
 296 taken near the green wall (sensor node 2) and in relatively
 297 short distance from the node 1 as it can be seen from Fig.1.
 298 The green area zone is closest to the node 3. The disposition
 299 of the sensor nodes allows to see the influence of the green
 300 area close to sensor node 3 and the benefit of the green wall
 301 near to sensor 2 on the quality of air on the micro-location
 302 where the experimental setup is positioned.

303 Fig. 4 and Fig. 5 present the measured data for PM2.5 and
 304 PM10 concentrations on a typical winter day. The obtained
 305 data shows average concentrations of PM2.5 and PM10 per
 306 hour respectively, but the measurements are taken with rate
 307 of one measurement per minute.

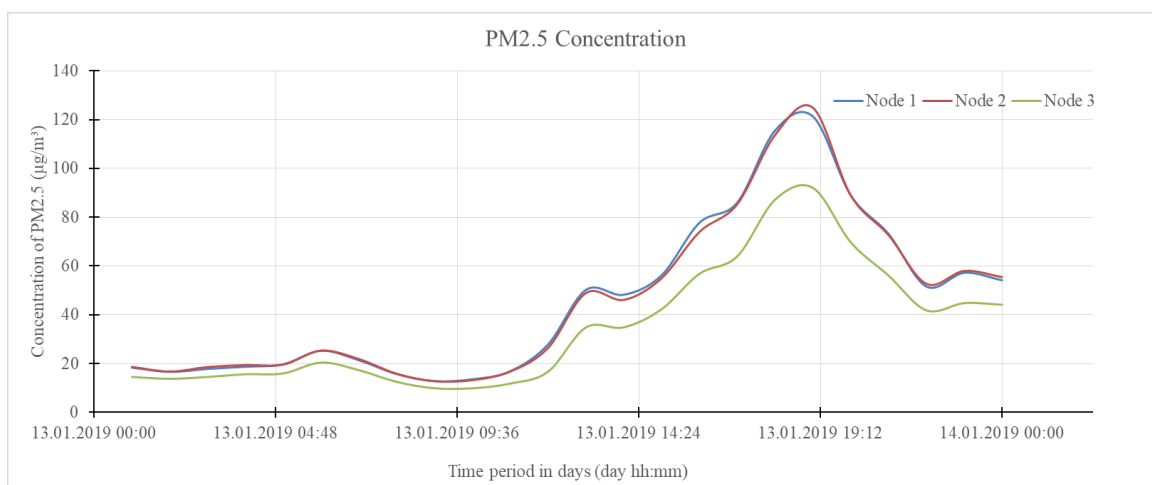


Fig. 4. PM2.5 concentration for 24-hour period from 13.01.2019 00:00 – 14.01.2019 00:00.

310 The PM2.5 concentration is higher than 30 $\mu\text{g}/\text{m}^3$, being th
 311 relative concentration allowed in the air. It is clearly visible
 312

313 that the concentrations increase during the day, when there is
 314 more movement and are usually lower during the late night
 315 and early morning hours.

316

317

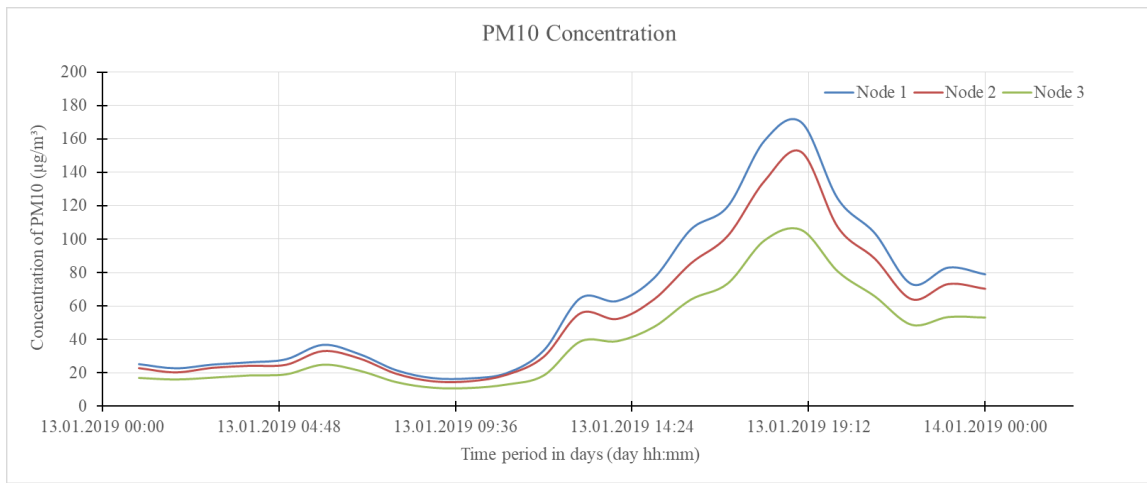


Fig. 5. PM10 concentration for 24-hour period from 13.01.2019 00:00 – 14.01.2019 00:00

318

319 The highest peak for PM2.5 concentration on 13th of
 320 January 2019 is 121 $\mu\text{g}/\text{m}^3$ and it was measured around 7 p.m.
 321 This value is above the allowed limit and is probably result
 322 of the household heating based on wood stoves or similar
 323 highly inefficient equipment.
 324 Similar conclusions can be drawn from the graph presented
 325 in Fig. 5. Namely, the concentrations of PM10 are higher than
 326 50 $\mu\text{g}/\text{m}^3$, being the relative concentration allowed in the air.
 327 The highest peak for PM10 concentration on 13th of January
 328 2019 is 170 $\mu\text{g}/\text{m}^3$ and it was measured also around 7 p.m.
 329 These two values for PM2.5 and PM10 concentrations are

330 measured at the sensor node 1, positioned near the road and
 331 frequent movement of people and vehicles. The analyses of
 332 the data indicate that the measurements at the sensor nodes 2
 333 and 3 show relatively lower values than the sensor node 1,
 334 which is actually the one that is located furthest from the
 335 green area.

According to the maximum allowed parameters presented in Table 2 for PM2.5 and PM10 concentrations the measured data show moderately polluted values for people with discomfort breathing and lung disease such as asthma.

340

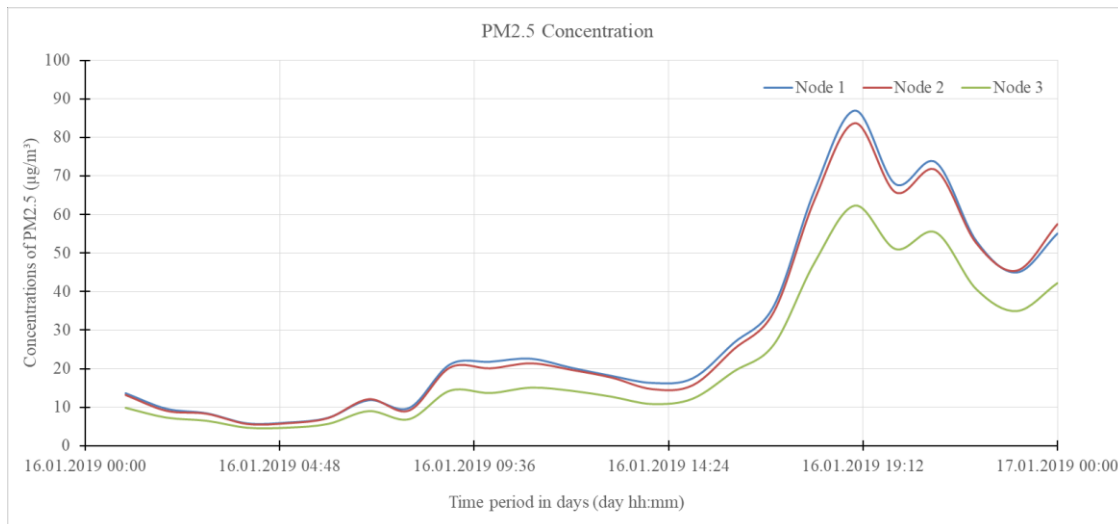


Fig. 6. PM2.5 concentration for 24-hour period from 16.01.2019 00:00 – 17.01.2019 00:00.

341

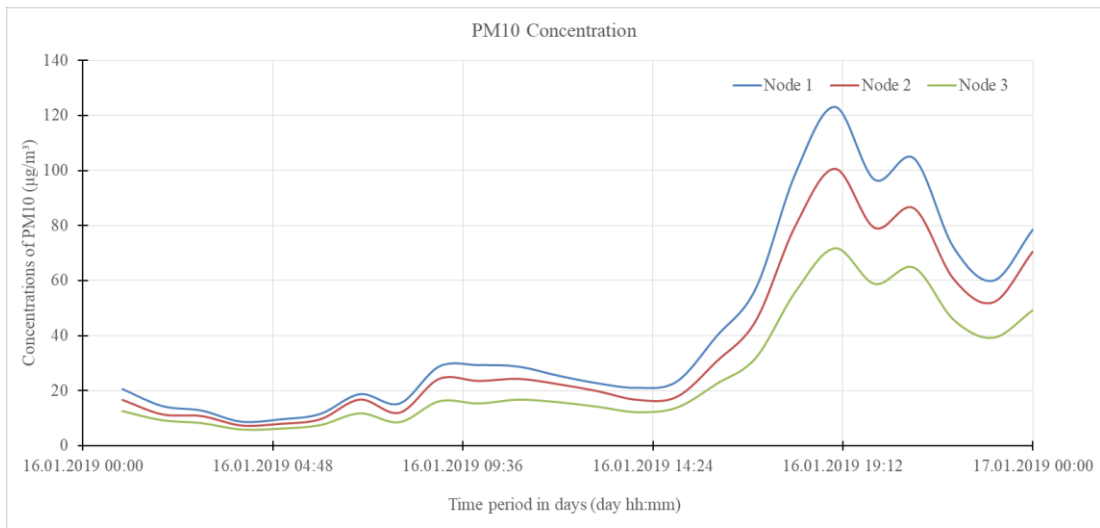


Fig. 7. PM10 concentration for 24-hour period from 16.01.2019 00:00 – 17.01.2019 00:00

342
 343 Figs. 6 and 7 present average PM2.5 and PM10
 344 concentrations also on a typical winter day. The presented
 345 measured data are chosen to be on 16th January 2019 showing
 346 also the highest values in the afternoon. The highest peak for
 347 PM2.5 concentration on 16th of January 2019 is 87 µg/m³
 348 while the highest peak for PM10 concentration on the same
 349 day is 123 µg/m³ at 7 p.m. The cited values are for sensor
 350 node 1 which is further away from the green wall setup
 351 compared to nodes 2 and 3. The measurement data presented
 352 in Figs. 6 and 7 also show that during the 16th of January the
 353 values of the PM2.5 and PM10 concentrations are above the
 354 allowed values for the PM2.5 and PM10 concentration.
 355 Similar conclusions can be drawn as in Figs. 4 and 5, the
 356 concentrations of PM2.5 and PM10 are increasing during the
 357 day and usually the peak of the concentrations are in the
 358 afternoon, when the household heating is turned on. Some local
 359 municipalities in Skopje do not have central heating, so one of
 360 of the reasons for the bad air quality is the heating on wood
 361 stoves or highly inefficient equipment. From the Figs. 4, 5, 6
 362 and 7, the concentrations of PM2.5 and PM10 are lowest
 363 early in the morning (00:00-08:00 a.m.) which is a result of
 364 low traffic, not frequent movement of people and other
 365 pollutants. Also in this period, the concentrations of PM2.5
 366 and PM10 at sensor node 3 are constantly lower compared to
 367 the other two nodes.
 368 The Figs. 4, 5, 6 and 7 show that there is a strong
 369 correlation between the PM2.5 concentrations and PM10
 370 concentrations.
 371 All the sensor nodes are placed on a platform near a
 372 photovoltaic (PV) installation. The sensor node 2 is placed
 373 near the PV cells. The node 2 is relatively close to the PV
 374 installation which may reduce the influence of
 375 meteorological factors in dust reduction to some extent.
 376 The position of the nodes, the objects positioned near the
 377 nodes and the existence of the green area have an influence
 378 on the PM2.5 and PM10 concentrations, showing constantly
 379 lower values for the particulate matter at the sensor nodes
 380 located near the green areas compared to the node close to the

pedestrian street and frequent movement of people and vehicles.

5 Conclusions

The main purpose of this paper is to present an experimental setup for air quality monitoring, to evaluate the measurement results and to analyze the influence of the green walls on air quality improvement on micro-locations.

Using only recycled materials and equipment in the design of the experimental setup makes this solution a low cost and easy to replicate on other locations. The acquired data can be used for online monitoring or off-line analyses.

Initial findings show that the highest values for the PM2.5 and PM10 concentrations usually occurred in the afternoon and are probably result of many factors, especially household heating. The measured values tend to be lower in the area nearer to the green zone and green wall structure. Although the presented measurement results are only for the winter months, the conclusion is similar also for the summer months, showing lower concentration of PM2.5 and PM10 nearer to the green area. The location of the green infrastructure in urban environments should be carefully planned in order to maximise its effect on air quality.

The project enables continuous monitoring of the PM2.5 and PM10 concentrations and gaseous pollutants. Using the IT technology and the sensor network shall provide a basis for analysis of the influence of the green wall in air quality improvement especially on PM concentration mitigation. Further considerations include analyses on how the weather conditions influence on the air pollution mitigation and defining a model that predicts the air pollution based on the weather data and the historical data about the pollution. The measured data for air pollution together with the weather information for temperature, humidity, wind speed, and wind direction could be combined to obtain the prediction model.

Further, the study will also reveal the economic benefits from the green walls through the provision of ecosystem services to society.

- 421 References 481
- 422 Alberto, A., Ramos, N. and Almeida, R., 2017. Parametric 482
- 423 study of double-skin facades performance in mild climate 483
- 424 countries. *Journal of Building Engineering*, Volume 11, No. 484
- 425 12, pp. 87-98. 485
- 426 Anon., 2020. *Internet of Things open platform*. [Online] 486
- 427 Available at: (2019, January) <https://thingspeak.com> 487
- 428 Anon., n.d. *Air Quality Index (AQI)*. (2019, January) 488
- 429 <https://waqi.info/> [Online]. 489
- 430 Berardi, U. G. H. A., 2014. State-of-the-art analysis of the 490
- 431 environmental benefits of green roofs. *Journal of Applied* 491
- 432 *Energy*, Volume 115, Vol.C, pp. 411-428. 492
- 433 Bigazzi, A. and Figliozzi, M., 2015. Roadway determinant 493
- 434 of bicyclist exposure to volatile organic compounds and 494
- 435 carbon monoxide.. *Journal of Transportation Environmen* 495
- 436 Volume 41, pp. 13-23 496
- 437 <https://doi.org/10.1016/j.trd.2015.09.008> 497
- 438 Bowler, D.E., Buyung-Ali, L., Knight, T.M. and Pullin 498
- 439 A.S.Urban greening to cool towns and cities: A systematic 499
- 440 review of the empirical evidence.. *Landscape and Urban* 500
- 441 *Planning*, Vol. 97, No. 3, pp. 147-155. 501
- 442 Brauer, M., Amann, M., Burnett, R.T., Cohen, A., Dentener 502
- 443 F.,Ezzati, M., Henderson, S.B., Krzyzanowski, M.,Martin 503
- 444 R.V., Van Dingenen, R., van Donkelaar, A. and Thurston 504
- 445 G.D. (2012) Exposure assessment for estimation of the global 505
- 446 burden of disease attributable to outdoor air pollution 506
- 447 *Environmental science & technology*, Vol. 46, No. 2., pp 507
- 448 652-660. 508
- 449 Cameron, R.W.F., Taylor, J.E. and Emmett, M.R. 509
- 450 (2014)What’s ‘cool’ in the world of green façades? How 510
- 451 plant choice influences the cooling properties of green walls 511
- 452 *Building and Environment*, Volume 73, pp. 198-207 512
- 453 <https://doi.org/10.1016/j.buildenv.2013.12.005> 513
- 454 Coma, J. et al., 2017. Vertical greenery systems for energy 514
- 455 savings in buildings: A comparative study between green 515
- 456 walls and green facades. *Journal of Building and* 516
- 457 *Environment*, Volume 111, pp. 228-237.
- 458 <https://doi.org/10.1016/j.buildenv.2016.11.014>
- 459 Currie, B. A. & B. B., 2008. Estimates of air pollution 460
- 461 mitigation with green plants and green roofs using the 462
- 462 UFORE model. *Urban Ecosystem*, Volume 11, No. 4, pp. 463
- 463 De Vito, S., Massera, E., Burrasca, G., Di Girolamo, A., 464
- 464 Miglietta, M., Di Francia, G. and Della Sala, D. (2008). 465
- 465 TinyNose: Developing a wireless sensor platform for 466
- 466 distributed air quality monitoring applications. *Sensors IEEE* 467
- 467 *Conference*, pp. 701-704.
- 468 Fahmy, M. and Sharples, S. (2011). Urban form, thermal 469
- 469 comfort and building CO2 emissions - a numerical analysis 470
- 470 in Cairo.. *Building Services Engineering Research and* 471
- 471 *Technology*, Vol. 32, No.1, pp. 73-84.
- 472 Jovanovski G., 2020. (2019, January) 473
- 473 [https://mojvozduh.eu/web/#draw?station=11Oktomvri&poll](https://mojvozduh.eu/web/#draw?station=11Oktomvri&pollutant=AQI&country=mk&language=mk) 474
- 474 [utant=AQI&country=mk&language=mk](https://mojvozduh.eu/web/#draw?station=11Oktomvri&pollutant=AQI&country=mk&language=mk) 475
- 475 [Online].
- 476 Heal, M., Kumar, P. and Harrison, R., 2012. Particles, air 477
- 477 quality, policy and health.. *Chem. Soc. Rev*, Vol. 41, No. 19, 478
- 478 pp. 6606-6630.
- 479 Ottel , M., van Bohemen, H.D. and Fraaij, A.L.A. (2010) 480
- 480 Quantifying the deposition of particulate matter on climber 481
- 481 vegetation on living walls. *Journal of Ecological* 482
- 482 *Engineering*, Vol. 36, No. 2, pp. 154-162.
- 483 Pottie, G.J. and Kaiser, W.J. (2008). Wireless Integrated 484
- 484 Network Sensors. *Communications of the ACM*, Vol. 43, No. 485
- 485 5, pp. 51-58.
- 486 Rowe, D. B., 2011. Green roofs as a means of pollution 487
- 487 abatement. *Environmental Pollution*, 8 Vol 159, No. 8, pp. 488
- 488 2100-2110.
- 489 Shah, P. S. and Balkhair, T., 2011. Air pollution and birth 490
- 490 outcomes: a systematic review. *Environmental international*, 491
- 491 Vol. 37, No.2, pp. 498-516.
- 492 Speak, A. F., Rothwell, J. J., Lindley, S. J. and Smith, C. L., 493
- 493 2012. Urban particulate pollution reduction by four species 494
- 494 of green roof vegetation in a UK city.. *Atmospheric* 495
- 495 *Environment*, Volume 61, pp. 283-293.
- 496 <https://doi.org/10.1016/j.atmosenv.2012.07.043>
- 497 Srbinovska, M., Gavrovski, C., Dimcev, V., Krkoleva, A. and 498
- 498 Borozan, V. (2015) Environmental Parameters Monitoring in 499
- 499 Precision Agriculture using Wireless Sensor Networks. 500
- 500 *Journal of Cleaner Production*, Volume 88, pp. 297-307.
- 501 <https://doi.org/10.1016/j.jclepro.2014.04.036>
- 502 Srbinovska, M., Krkoleva, A., Andova, V. and Celeska, M., 503
- 503 2017. *Wireless Sensor Networks Implemented in Vertical* 504
- 504 *Green Walls for Air Quality Improvement*.. Dubrovnik, 505
- 505 s.n.Steeneveld, G. J. et al., 2011. Quantifying urban heat 506
- 506 island effects and human comfort for cities of variable size 507
- 507 and urban morphology in the Netherlands. *Journal of* 508
- 508 *Geophysical Research: Atmospheres*, Vol. 116, No. D20, pp. 509
- 509 1984-2012.
- 510 Velkovski, B., Srbinovska, M. and Dimcev, V., 2019. 511
- 511 *Implementation of a Green Wall Structure in Particulate* 512
- 512 *Matter Reduction Using an Air Quality Monitoring System*. 513
- 513 Novi Sad, IEEE
- 514 World Health Organization (WHO) (1999) *Monitoring* 515
- 515 *Ambient Air Quality for Health Impact Assessment*, WHO 516
- 516 Regional Publications, European Series, No. 8

Low – cost energy – efficient air quality monitoring system using sensor network